



Dynaric, Inc.

# AM650

## High Speed Automatic Strapping Machine

---

For all of  
your General  
Packaging  
Needs



- ▶ Performance
- ▶ Reliability
- ▶ User Friendly

**Dynaric, Inc.**

Certified Minority Owned Business


▶ Phone: (800)526-0827 ▶ Fax: (757)363-8016 ▶ E-mail: [order@dynaric.com](mailto:order@dynaric.com) ▶ Web: [www.dynaric.com](http://www.dynaric.com)



**Making  
 Your  
 Strapping  
 Job Easier**

The AM650 is a high speed automatic heat seal strapping machine that is designed for ease of operation by equipment operators. It is capable of applying up to 50 straps/minute to a wide range of sizes and types of packages.

The AM650 can operate with 5mm and 6mm strap widths. Because of its ability to use many sizes of strap, and its electronic tension control, it enables the customer to choose the least expensive strap for their package. The AM650 has many standard features that include automatic coil feed system, strap loop ejector, short feed detector, refeed system and foot bar cycle activation pedal. These special user friendly features combine to increase strapping performance and reliability, as well as providing ease of operation for the equipment operator.

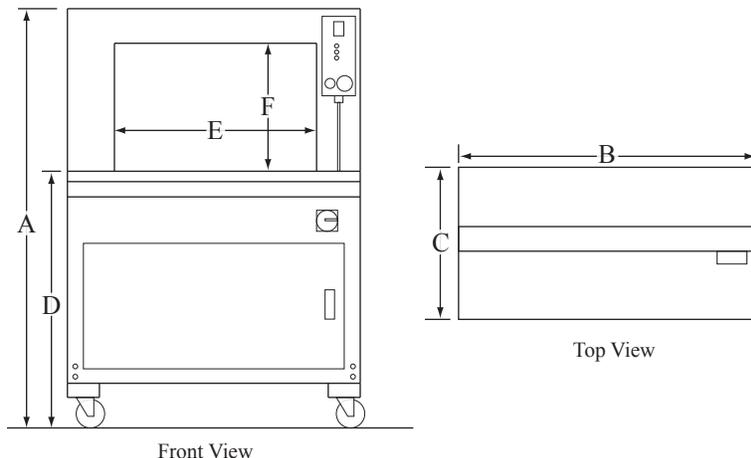

A	52.2" (1327mm)
B	36.7" (933mm)
C	22.7" (577mm)
D	31.5" (800mm)
E	25.5" (650mm)
F	15.4" (400mm)

**At A Glance**

- Servo motors for precise performance and elimination of belts, clutches and pulleys.
- Wide range electronic tension control
- Adjustable strap heat seal dwell time for optimum seal joint efficiency
- Applies 50 straps/minute
- Automatic coil feed system for ease of start up
- End of strap sensor and strap loop ejector
- Strap re-feed system in case of a short feed
- Standard foot bar pedal activator and start cycle push button
- Standard arch sizes available 650mm wide x 400mm high and 650mm x 600mm high

**Specifications**

<b>Cycle Time:</b>	50 straps per minute
<b>Tension Range:</b>	2.2-121 lbs.
<b>Strap Width:</b>	5mm or 6mm
<b>Sealing Method:</b>	Heating Element
<b>Reel Inside Diameter:</b>	200, 230, 280 mm (specified)
<b>Power Supply:</b>	110/220/230/240V,50/60Hz,1PH
<b>Power Consumption:</b>	0.5 kw
<b>Standard Arch Size:</b>	W 650 x H 400 mm
<b>Table Height:</b>	800mm
<b>Layout Dimension:</b>	L 933 x W 577 x H 1327 mm
<b>Machine Weight:</b>	573 lbs.

**Personalize Your Packages**



Personalize your plastic strapping. Dynaric's high quality printed plastic strapping can be custom printed with your company logo, name, information or message. Printed strapping is an economical way to identify special products, display company logo and information or for product security and more.



Scan to receive our newsletters

